


# Installation Guide

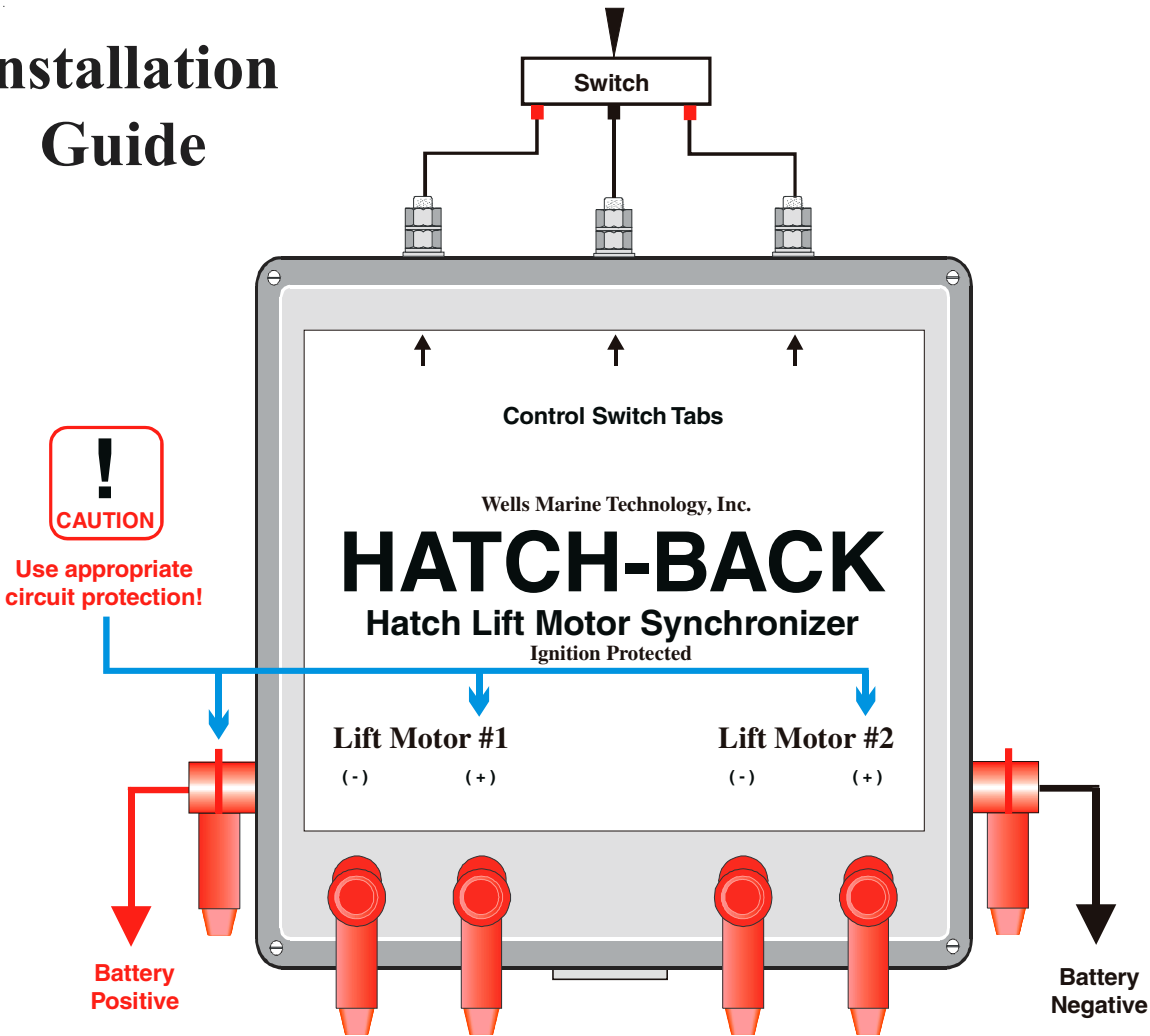

The Hatch Back is designed to control two worm gear motors used to lift heavy engine hatches simultaneously. The Hatch Back does this with very little current (approximately 1 amp) carried through the switch.

1. Connect the battery used to operate the Hatch lift motors to the Positive and Negative large terminals on the side of the unit (as illustrated).
2. Connect the two worm gear motors to the Lift Motor terminals on the lower front of the unit.
3. Wire the "ON-OFF-ON" switch (provided) to the small terminals on the top of the unit. The center "tab" of the switch **MUST** be connected to the center terminal.
4. When installing the switch, rotate it so the hatch goes "UP" and "DOWN" with the direction the switch toggle is pushed.

Additional switches will connect the same way.

## WELLS MARINE TECHNOLOGY, INC.

4 Crescent Drive

Brielle, New Jersey 08730

Ph. 877-228-6299 email: [jack@wellsmarinetech.com](mailto:jack@wellsmarinetech.com)

[www.wellsmarinetech.com](http://www.wellsmarinetech.com)